


## VARIMETER Undervoltage Relay, Single-Phase IK 9173, SK 9173

Translation  
of the original instructions

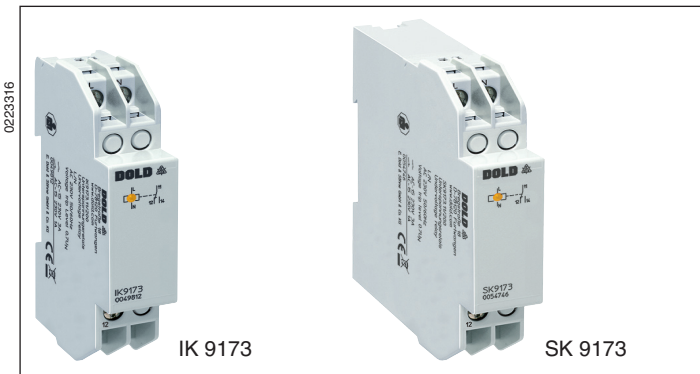

### Your Advantages

- Preventive maintenance
- For better productivity


### Features

- According to IEC/EN 60255-1
- Monitoring of undervoltage
- Without auxiliary supply
- Optionally fixed or settable response value
- N.C. circuit operation
- Optionally with off-delay  $t_1$
- Optionally with on-delay  $t_2$
- LED indicator for state of output relay
- 1 changeover contact
- Devices available in 2 enclosure versions:
  - IK 9173: Depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43880
  - SK 9173: Depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
- Width 17.5 mm

### Product Description

The IK 9173 and SK 9173 voltage relays in the VARIMETER series monitor AC voltage networks for undervoltage. The measurement is very simple and does not require a lot of wiring, as no separate auxiliary voltage is required. Early detection of impending failures and preventive maintenance prevent costly damage and, as a user, you benefit from the operational reliability and high availability of your system.

### Function Diagram

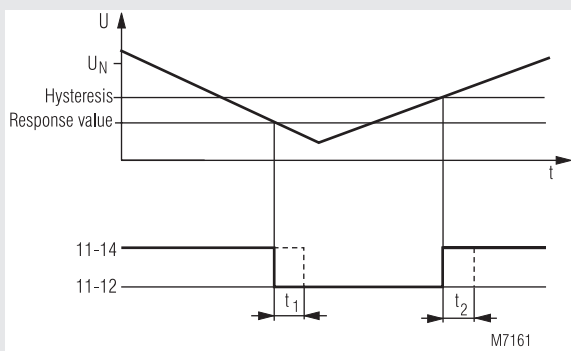

### Approvals and Markings




### Applications

Monitoring of voltage systems on undervoltage. Automatic switching to emergency supply or of emergency light in the case of phase loss according to DIN VDE 100-710, or DIN VDE 0108.

Variant with  $t_2$  is used in unstable voltage systems, where after phase failure detection the consumers should be energized one after the other. This is done by setting the operate delay of the different relays to different values. This variant is also used where a consumer after only short phase failure should not be started immediately (e.g. compressors).

Suitable for industrial and railway applications.

### Circuit Diagram

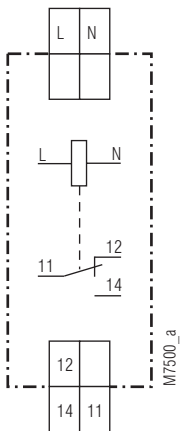

IK 9173.11, SK 9173.11

### Terminal Connection

Terminal designation	Signal description
L, N	Voltage supply / measuring inputs AC/DC
11, 12, 14	Changeover contacts (output relays)

### Function

The arithmetic mean value of the voltage L-N is measured.

### Indication

Yellow LED: Output contact active (11-14 closed)

### Notes

The time delay for the models with delay  $t_1$  is only active as long as the phase voltage L-N is above  $0.5 U_N$ .

## Technical Data

### Input Circuit

<b>Nominal voltage <math>U_N</math>:</b>	AC 24, 42, 110, 230 V DC 24, 48, 60, 110, 125 V
<b>Max. overload:</b>	1.15 $U_N$ continuously
<b>Nominal consumption:</b>	Approx. 6 VA / DC 1 W
<b>Frequency range:</b>	45 ... 65 Hz

### Setting Ranges

<b>Response value:</b>	Fixed: 0.7 or 0.85 $U_N$ Adjustable: 0.55 ... 1.05 $U_N$ (0.7 ... 1.0 $U_N$ at DC 24 V)
<b>Hysteresis:</b>	Approx. 4 % of setting value
<b>Time delay <math>t_1</math> / <math>t_2</math>:</b>	0.5 ... 20 s
<b>Reaction time of the measuring input at phase failure:</b>	Approx. 100 ms

### Output

<b>Contacts</b>	IK 9173.11, SK 9173.11: 1 changeover contact	
<b>Contact material:</b>	AgNi	
<b>Measured nominal voltage:</b>	AC 250 V	
<b>Thermal current <math>I_{th}</math>:</b>	4 A	
<b>Switching capacity</b>	to AC 15:	
NO contact:	3 A / AC 230 V	IEC/EN 60947-5-1
NC contact:	1 A / AC 230 V	IEC/EN 60947-5-1
<b>Electrical life</b>	IEC/EN 60947-5-1	
at AC 230 V, 1 A ( $\cos \varphi = 0.5$ ):	$\geq 3 \times 10^5$ switching cycles	
<b>Short circuit strength</b>		
<b>max. fuse rating:</b>	4 A gG / gL	IEC/EN 60947-5-1
<b>Mechanical life:</b>	$\geq 30 \times 10^6$ switching cycles	

### General Data

<b>Operating mode:</b>	Continuous operation	
<b>Temperature range</b>		
Operation:	- 20 ... + 60 °C	
Storage:	- 25 ... + 60 °C	
<b>Relative air humidity:</b>	93 % at 40 °C	
<b>Altitude:</b>	$\leq 2000$ m	
<b>Clearance and creepage distances</b>		
Rated impulse voltage/ pollution degree:	4 kV / 2	IEC 60664-1
<b>EMC</b>		
Electrostatic discharge:	8 kV (air)	IEC/EN 61000-4-2
HF irradiation		
80 MHz ... 1 GHz:	20 V / m	IEC/EN 61000-4-3
1 GHz ... 2 GHz:	20 V / m	IEC/EN 61000-4-3
2 GHz ... 2.7 GHz:	1 V / m	IEC/EN 61000-4-3
Fast transients:	2 kV	IEC/EN 61000-4-4
Surge voltages between		
wires for power supply:	2 kV	IEC/EN 61000-4-5
Between wire and ground:	4 kV	IEC/EN 61000-4-5
HF-wire guided:	30 V	IEC/EN 61000-4-6
Interference suppression:	Limit value class B	EN 55011
<b>Degree of protection</b>		
Housing:	IP 40	IEC/EN 60529
Terminals:	IP 20	IEC/EN 60529
<b>Housing:</b>	Thermoplastic with V0 behaviour according to UL subject 94	
<b>Vibration resistance:</b>	Amplitude 0.35 mm, frequency 10 ... 55 Hz, IEC/EN 60068-2-6	
<b>Climate resistance:</b>	20 / 060 / 04 IEC/EN 60068-1	
<b>Terminal designation:</b>	EN 50005	
<b>Wire connection:</b>	2 x 2.5 mm <sup>2</sup> solid or 2 x 1.5 mm <sup>2</sup> stranded ferruled DIN 46228-1/-2/-3/-4	
<b>Wire fixing:</b>	Flat terminals with self-lifting clamping piece IEC/EN 60999-1	
<b>Fixing torque:</b>	0.8 Nm	

## Technical Data

<b>Mounting:</b>	DIN rail mounting (IEC/EN 60715) or screw mounting M4, 90 mm hole pattern, with additional clip available as accessory
------------------	--

<b>Weight</b>	
IK 9173:	65 g
SK 9173:	83 g

### Dimensions

#### Width x height x depth

IK 9173:	17.5 x 90 x 59 mm
SK 9173:	17.5 x 90 x 98 mm

### Classification to DIN EN 50155

<b>Vibration and shock resistance:</b>	Category 1, Class B	IEC/EN 61373
<b>Protective coating of the PCB:</b>	No	

### Standard Types

IK 9173.11/200, AC 230 V, 0.7 $U_N$	
Article number:	0049812
SK 9173.11/200, AC 230 V, 0.7 $U_N$	
Article number:	0054746
• Detection of undervoltage at $< 0.7 U_N$	
• Fixed response value	
• Without time delay	
• Output:	1 changeover contact
• Nominal voltage $U_N$ :	AC 230 V
• Width:	17.5 mm

### Variants

IK 9173.11/000	
0	De-energized on trip
1	Energized on trip
0	Without time delay
3	Settable time delay $t_1$
4	Settable time delay $t_2$
0	Settable response value
2	Fixed response value

### Ordering example for variants

IK 9173 .11 /	AC 230 V	50/60 Hz	0.55 ... 1.05 $U_N$	0.5 ... 20 s	
					Time delay $t_2$
					Response value
					Response value
					Nominal voltage
					Variant, if required
					Contacts
					Type